FASTENERS**


GREATNESS AT EVERY TURN

GRK Fasteners offers a wide selection of fasteners that includes multipurpose, structural, deck, trim, cabinet, composite and stainless screws, but they all have one thing in common—quality.

GRK Fasteners allows users to complete jobs with more productivity. Our patented W-CutTM Threadform feature reduces installation torque and allows fast driving and ease of install, the recessed Star Drive eliminates recess stripping for improved productivity, and the Zip-TipTM feature eliminates the need for pre-drilling and allows one-step installation. GRK's feature-rich screws drive jobsite productivity and allow users to keep moving from one job to the next.

GRK fasteners are corrosion resistant, approved for use in treated lumber and designed for both interior and exterior use.



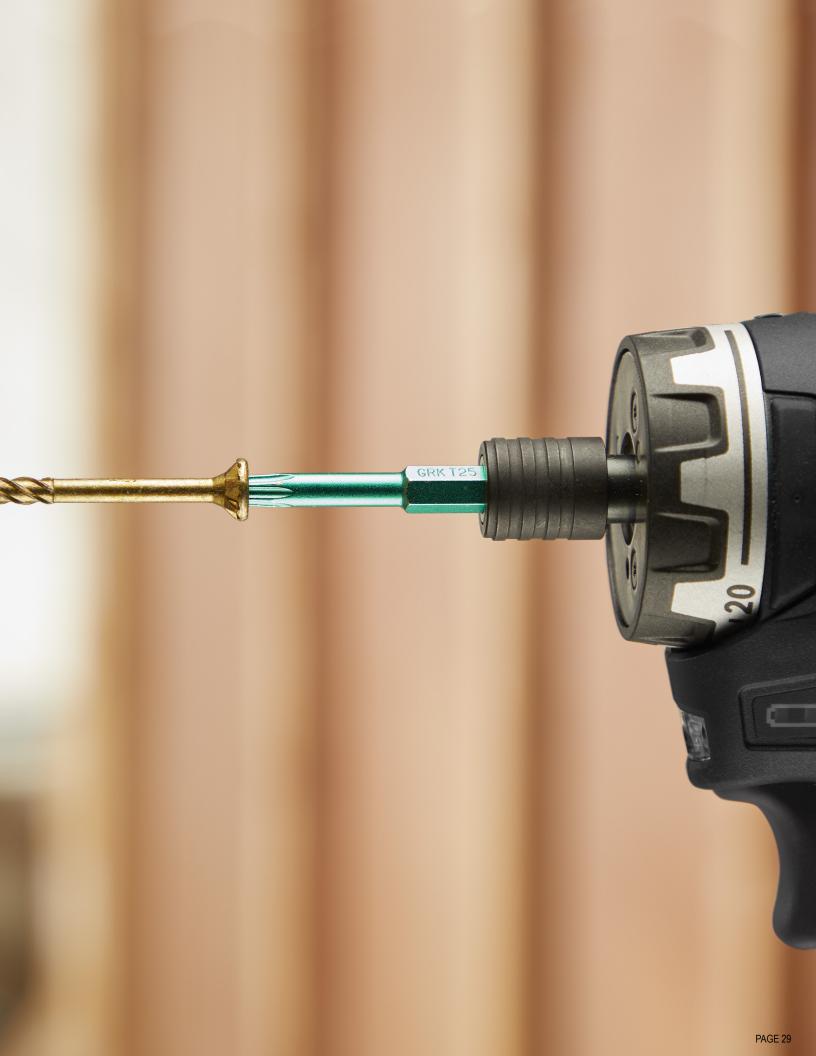

R4TM MULTI-PURPOSE FRAMING & DECKING SCREWS



FASTER DRIVE FOR IMPROVED PRODUCTIVITY

GRK's R4™ Multi-purpose Screw is a versatile, code-approved fastener for hundreds of applications. Its feature-rich design provides a fast and reliable connection every time.

- Fast Bite Tip: Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling
- W-Cut™: Low torque, faster drive
- **Precision Fit:** Reduces wobble between R4 screws and GRK bits for improved productivity¹
- CEE Thread™: Enlarges hole to reduce splitting²
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- Underhead Cutting Teeth: Cuts wood fiber & provides flush seating
- **GRK Head Markings:** Easy identification of genuine GRK screws
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber³
- **Code Approved:** For structural applications (see ESR-3201)⁴
- Some sizes also available in PHEINOX™ 305 and 316 grade Stainless Steel• For interior / exterior use
- 1. Precision Fit included on #9 and #10 sizes only
- 2. CEE Thread included on fasteners 2" and longer
- For cedar, redwood and other naturally protected woods, GRK Pheinox™ 305 and 316 stainless steel is recommended
- 4. ICC Code Approval for #9, #10, and #12 sizes only






FSR-3201





	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Contractor Packs (XL buckets) Part No.	Contractor Packs (XL buckets) Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./ Screw Qty. (per EA)
T-15	#6 x 1-1/4"	00051	13,000						
T-15	#8 x 1-1/4" #8 x 1-1/2" #8 x 1-3/4" #8 x 2" #8 x 2-1/2"	00073 00077 00079	6,500 4,500 3,500			01069 01073 01075 01077 01079	1,300 1,000 925 850 650	96080 96085 02075 02077 02079	4/110 4/110 20/100 20/100 20/100
T-25	#9 x 1-1/4" #9 x 1-1/2" #9 x 1-3/4" #9 x 2" #9 x 2-1/2" #9 x 2-3/4" #9 x 3-1/8"	00091 00095 00097 00099 00101 00103 00105	8,000 5,200 4,500 3,700 2,900 2,000 1,900	120990 121010 121050	990 900 720	01095 01099 01101 01103 01105	820 690 575 480 425	02095 103099 103101 02103 103105	20 / 100 4 / 110 4 / 100 10 / 100 4 / 80
T-25	#10 x 2" #10 x 2-1/2" #10 x 2-3/4" #10 x 3-1/8" #10 x 3-1/2" #10 x 4" #10 x 4-3/4"	00131 00133 00135 00137 00139 00141 00143	3,200 2,500 2,000 1,500 1,200 1,000 800	95200 121410	630 450	01133 01137 01139 01141 01143	470 350 300 270 230	103133 103137 02139 103141 02143	4 / 80 4 / 70 10 / 50 4 / 50 10 / 50
T-25	#12/14 x 5-5/8" #12/14 x 6-3/8" #12/14 x 8"	00173 00177 00181	600 1,000 500					96089 02177 02181	4 / 50 9 / 50 9 / 50

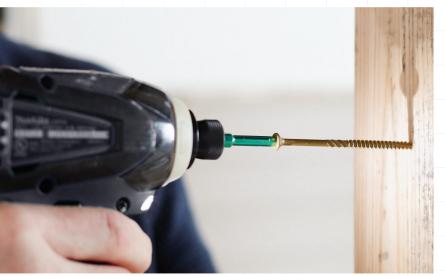

Pro Packs need to be ordered in multiples of two
2" bit included in Pro Packs. 1" bit with Handy Packs

- Multi-Purpose Framing
- Interior and Exterior Remodeling
- Porches and Patios
- Fencing
- Exterior Structures

RSS™ STRUCTURAL RUGGED STRUCTURAL SCREWS



EASY TO INSTALL LAG ALTERNATIVE

GRK's RSS™ Rugged Structural Screw is a structural fastener designed for ease of installation and the strongest of connections. RSS fasteners drive into most woods without the need for pre-drilling. The specially engineered design results in a low-effort installation, especially compared to conventional lag screws.


- Fast Bite Tip: Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling¹
- W-Cut™: Low torque, faster drive
- Precision Fit: Reduces wobble between RSS screws and GRK bits for improved productivity²
- Integrated Washer Head: Maximum clamping force
- Star Drive Recess: Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- CEE Thread™: Enlarges hole to reduce splitting³
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber³
- **Code Approved:** For structural applications (see ESR-2442)⁴
- Some sizes also available in PHEINOX™ 305 and 316 grade Stainless Steel• For interior / exterior use
- 1. Zip-Tip included on fasteners 2-1/2" and longer
- 2. Precision Fit included on 5/16" sizes only
- 3. CEE Thread included on fasteners 3-1/8" and longer
- For cedar, redwood and other naturally protected woods, GRK Pheinox™ 305 and 316 stainless steel is recommended
- 5. ICC Code Approval for 1/4", 5/16", and 3/8" sizes only



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack MC Qty./ Screw Qty. (per EA)	Individually Tagged Part No.	Individually Tagged (Qty./Ctn.)
T-25	#10 x 2-1/2" #10 x 3-1/8"	10133 10137	1,000 800	11137	236	12133 12137	10 / 50 10 / 50		
T-25	1/4" x 1-1/2" 1/4" x 2" 1/4" x 2-1/2" 1/4" x 3-1/2" 1/4" x 3-1/8"	10151 10155 10157 10161	1,000 800 700			12151 12155 12161	20 / 50 10 / 50 10 / 50	90305 90306	1/75 1/75
T-30	5/16" x 2-1/2" 5/16" x 2-3/4" 5/16" x 3-1/8" 5/16" x 3-1/2" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	10217 10219 10221 10223 10225 10231 10235	600 500 500 500 400 300 300	12219 12221 12223 12225 12231 12235	2/100 2/100 2/100 2/100 9/50 9/50	12217 14221 95307 14425 14235 14235	9 / 100 10 / 25 4 / 45 10 / 25 10 / 25 10 / 25	96001 90307 96005 96010 96015	1 / 50 1 / 50 1 / 50 1 / 50 1 / 40
T-40	3/8" x 3-1/8" 3/8" x 4" 3/8" x 6" 3/8" x 7-1/4" 3/8" x 8" 3/8" x 10" 3/8" x 12" 3/8" x 14-1/8" 3/8" x 16"	10273 10275 10281 10285 10287 10293 10299	400 400 300 200 300 300 300 300	12275 12281 12285 12287 12293 12299 12307 12311	9 / 50 2 / 50			96020 96025 96030	1 / 25 1 / 25 1 / 20

RSS™	ITS -	OIST AND TRUSS SCREW
1133	, פוע	OIST AIRD TROOS SCILLIN

	1/4" x 5"				93735	5	9 / 50
15	1/4" x 6-3/4"	91743	300		93743	3	9 / 50

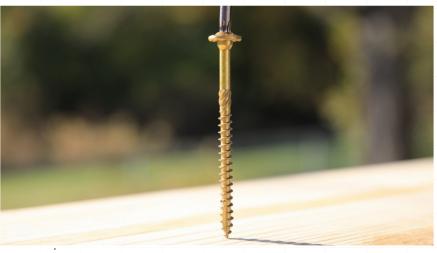

- Structural Decking
- Heavy Duty Framing
- LVL Fastening
- Ledger Boards
- Multi-ply
- Interior and Exterior Remodeling

- Pro Packs need to be ordered in multiples of two2" bit included in Pro Packs. 1" bit with Handy Packs

DECK ELITEDECKING SCREWS



SPEED. QUALITY. ELEVATED CRAFTSMANSHIP

GRK's Deck Elite screws are designed for use in wood deck boards and provide a quick drive and clean finish. Deck Elite screws start immediately in wood with a smooth, fast drive to increase productivity on the job and the tan color of the screw provides an ideal finish.

- Tan Color: Provides an ideal finish
- Fast Bite Tip: Provides a fast start for one-step installation
- Zip-Tip™: Eliminates pre-drilling
- W-Cut™: Low torque, faster drive
- CEE Thread™: Enlarges hole to reduce splitting¹
- Star Drive Recess: Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- Corrosion Resistant Coating: Resists rust and keeps decks looking new
- For use in wood deck boards, fencing, and deck rails, including pressure treated lumber²
- For interior / exterior use

- 1. CEE Thread included on fasteners 2" and longer
- For cedar, redwood and other naturally protected woods, GRK Pheinox™ 305 and 316 stainless steel is recommended





T-25



- Contractor Packs and Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs. 1" bit with Contractor Packs



- Deck Boards
- Fencing
- Deck Rails

FIN/TRIMTM FINISHING TRIM HEAD SCREWS



PROFESSIONAL FINISH, PROFESSIONAL LOOK

GRK's Fin/Trim™ screws are an excellent choice for most fine carpentry applications, as well as window extension jambs, joining cabinets and more. A combination of the smallest screw head available and code approved structural performance means the most secure, concealed fastening in the industry.

- Trim Head: Clean, finished look
- Star Drive Recess: Zero stripping, with 6 points of contact
- W-Cut™: Low torque, faster drive
- Zip-Tip™: Eliminates pre-drilling
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber¹
- Code Approved: For structural applications (see ESR-3201)
- Some sizes also available in PHEINOX™ 305 and 316 grade Stainless Steel• For interior / exterior use

 For cedar, redwood, and other naturally-protected woods, GRK recommends PHEINOX™ stainless steel fasteners



U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
#8 x 1-1/4" #8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 2-3/4" #8 x 3-1/8"	15724 15728 15730	6,500 4,500 3,500 2,500	116724 116728 16730	600 510 605	96055 119724 119728 119730 17732 119734	6 / 100 6 / 100 6 / 100 6 / 100 20 / 100 6 / 100
#9 x 4" #9 x 5"	15760 15766	1,000 800			117760 117766	4 / 50 4 / 50



White Fin/Trim™				
#8 x 2"	16828	605	96060	4 / 100
#8 x 2-1/2""	16830	505	96065	4 / 100

- Pro Packs need to be ordered in multiples of two
 2" bit included in Pro Packs. 1" bit with Handy Packs



- Trim Work
- Cabinets
- Fine Carpentry

RT COMPOSITE™ EXTERIOR TRIM SCREW



INSTALL RIGHT THE FIRST TIME

The RT Composite™ screw is a specially designed fastener for attaching composite and cellular PVC materials. Reverse threading under the head of the fastener helps the screw head disappear beneath the surface of the classic wood composite material while reducing or eliminating the dimple that is common in this substrate.

- Trim Head: Clean, finished look
- Underhead Reverse Thread: Reduces or eliminates mushrooming
- Star Drive Recess: Zero stripping, with 6 points of contact
- W-Cut™: Low torque, faster drive
- Zip-Tip™: Eliminates pre-drilling
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber¹
- Available in Climatek or White Cimatek coated finish
- Some sizes also available in PHEINOX™ 305 and 316 grade Stainless Steel• For interior / exterior use

 For cedar, redwood, and other naturally-protected woods, GRK recommends PHEINOX™ stainless steel fasteners





	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
T-10	#8 x 2" #8 x 2-1/2" #8 x 3-1/8"	15079 15083	3,500 2,500	16077 16079 16083	725 605 514	119077 119079 119083	6 / 100 6 / 100 6 / 100
T-15	#9 x 2-1/2" #9 x 3-1/8"	15101 15105	2,900 1,900	16101 16105	408 348		

White RT Composite™ #8 x 2" 16628 605 17628 20 / 100 #8 x 2-1/2" 16630 505 96075 4/100 #8 x 2-3/4" 17632 20 / 100 #8 x 3-1/8" 17634 10 / 100

• Pro Packs need to be ordered in multiples of two

T-10

• 2" bit included in Pro Packs. 1" bit with Handy Packs



- Exterior Trim
- cPVC Deck Boards
- Hidden Fastening Systems

PHEINOX™ STAINLESS STEEL SCREWS

PHEINOX™ 305 CORROSION RESISTANCE FOR HIGH MOISTURE ENVIRONMENTS

PHEINOX™ 316 MARINE GRADE PROTECTION FOR SUPERIOR CORROSION RESISTANCE



GRK's PHEINOX™ line of stainless steel fasteners feature designs from R4, RSS, Fin/Trim, and RT Composite screws in corrosion and stain resistant material.

GRK recommends PHEINOX™ 305 stainless steels screws for applications that require superior corrosion resistance in exterior environments with high moisture content, such as docks, boardwalks, pools, and hot tubs. PHEINOX™ 305 stainless is also recommended for use with cedar, redwood and various other wood species that have higher acid content. PHEINOX™ 305 stainless steels screws are recommended for applications located more than 1 mile from the coast.

PHEINOX™ 316 stainless steels screws are recommended for applications where extreme corrosion resistance is necessary, such as environments with high exposure to chlorides- such as de-icing salts- and in coastal applications within 1 mile of the coast. They are also suitable for use in chemically treated wood and naturally-protected wood such as cedar and redwood.

PHEINOX™ 305 Stainless Steel

- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

PHEINOX™ 316 Stainless Steel



- For use within 1 mile of the coast
- Marine-Grade protection for superior corrosion resistance
- Superior Corrosion resistance for coastal environments
- Stain resistant in specialty wood











	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
	R4™ Screws: PHE	INOX™ 305					
T-25	#10 x 2-1/2" #10 x 3-1/8"	25133 25137	2,500 1,500	61633 61637	240 210	61733 61737	4 / 80 4 / 70
	RSS™ Screws: PH	EINOX™ 305	;				
T-30	5/16" x 3-1/8" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	30221 30225 30235	500 400 300			62225 132231	4 / 45 4 / 40
	RT COMPOSITE™	Trim Screw	s: PHEINOX	™ 305			
T-10	#8 x 2" #8 x 2-1/2"	35079	3,500	36077 36079	600 560	37079	20 / 100
T-15	#9 x 2-1/2"	- PUEING	VW 205	36101	365		
	FIN / TRIM™ Scre	WS: PHEINC	X™ 305				
T-10	#8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 3-1/8"			61728 61730 36734	510 420 385	37724 67728 67730 37734	20 / 100 6 / 100 6 / 100 10 / 100
T-15	#9 x 2-1/2"			36752	365		
	R4™ Screws: PHE	INOX™ 316					
T-25	#10 x 2-1/2" #10 x 3-1/8"					137133 137147	4 / 80 4 / 70
	FIN / TRIM™ Scre	ws: PHEINO	X™ 316				
T-10	#8 x 2-1/2"					147730	6 / 100
	• 2" hit included in Pr	o Packs 1" hit	with Handy P	acks			



- Boardwalks
- Pool Decks
- Spas

LOW PROFILE CABINETTM CABINET SCREWS



QUICK AND SECURE INSTALLATION

GRK's Cabinet screws are designed for use in cabinet construction and installation. Cabinet screws are manufactured in a #8 gauge (4 mm) diameter for universal size convenience.

- Star Drive Recess: Zero stripping, with 6 points of contact
- **Zip-Tip™:** Eliminates pre-drilling¹
- W-Cut[™]: Low torque, faster drive
- Washer Head: Creates a flush, clean hold for a strong and secure installation
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber²
- White Cabinet Coating: Color matched for interior applications
- For interior / exterior³ use

- 1. Zip-Tip included on fasteners 1-1/4" and longer
- For cedar, redwood, and other naturally-protected woods, GRK recommends PHEINOX™ stainless steel fasteners
- 3. White Cabinet Coating only suitable for interior use



U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack MC Qty./Screw Qty. (per EA)
#8 x 1"					96050	6 / 100
				-		
#8 x 1-1/4"	10069	4,000	100069	330	114069	6 / 100
#8 x 1-1/2"	10073	3,000	100073	330	114073	6 / 100
#8 x 1-3/4"	10075	2,000			12075	10 / 100
#8 x 2"	10077	2,000	96077	330	113077	4 / 100
#8 x 2-1/2"	10079	1,500	110079	330	113079	4 / 100
#8 x 2-3/4"					113081	4 / 100
#8 x 3-1/8"	10083	1,000	110083	270	114083	6 / 50





#8 x 1-1/4"		120680	6 / 80
#8 x 1-1/2"		120670	6 / 80
#8 x 2-1/2"		120660	6 / 80

- Pro Packs need to be ordered in multiples of two
- 2" bit included in Pro Packs



- Cabinet Construction & Installations
- Trim & Moulding
- Light-Duty Framing

TOP STAR™ ADJUSTABLE SHIM SCREWS



FOR PLUMB INSTALLATION OF WOODEN DOORS AND WINDOWS. NO MORE SHIMS!

GRK's adjustable Top Star™ shim screw is a screw within a screw that allows you to install wooden doors or windows without the use of shims. The quick and easy system reduces labor and allows for hassle free adjustment to ensure plumb installation.

The 4-point top sleeve provides a secure hold into the frame, while the GRK Star Drive bit is used to make the adjustments needed for a perfect, shim-free installation.

The Top Star's highly-engineered system can be used for installation of wooden doors, windows, insulation, paneling, wall-units, and cabinets.

- **Recessed Star Drive:** Zero stripping, with 6 points of contact
- **4-point 3/8" Diameter Threaded Sleeve** provides a secure hold in your wooden frame
- Micro-Adjustments allow for an absolute plumb installation
- Use with GRK's Top Star™ Crown and T-15 Star Bit System
- Zinc Plated finish for lasting durability
- For Shim Free Installation of wooden doors, windows, insulations, paneling, built-in wall units, and cabinets




U.S (Std.) Size	Pro Pack	Pro Pack
(Dia. x Length)	Part No.	Pail Qty.
3/8" x 2-1/2"	20157	100
3/8" x 3-1/8"	20161	100


• Pro Packs need to be ordered in multiples of two


The Complete Top Star™ System Includes:							
Bit	Crown	Threaded Sleeve					


Crown / Bit	Blister Pack Part No.	Blister Pack Qty.
Includes: (1) Crown / Bit with each	86465	1

• 5/16" drill bit not included









The Bit drives the Top Star™ into the material when the Crown and Bit are combined. Using the Bit without the Crown adjusts the distance.

The Threaded Sleeve moves independently from the Top Star™ unless locked by the Crown. When locked, the Top Star™ gets driven into the material.

Unlocked, the installed Top Star™is ready for leveling.



- Wooden Doors
- Windows
- Insulation

CALIBURN™ CONCRETE SCREW



HEAVY DUTY CONCRETE AND MASONRY FASTENER

Caliburn™ Concrete screws are professionally engineered fasteners with a patented thread design for ease of driving the screw into concrete and similar applications.

- **Star Drive Recess:** Zero stripping, with 6 points of contact
- Aggressive Heavy Duty Threads lock into concrete and can be removed/reinserted without screw damage
- Calibrun™ XL: washer head design for superior holding power
- Climatek™ Coating: ICC-ES AC257 code approved for use in treated lumber
- Ideal for use in anchoring to concrete or wood to concrete applications including basement framing and sheds

- Wood to Concrete Framing
- Electrical and Plumbing Fixtures
- Caliburn XL for Heavy Duty Concrete Anchoring







	Std.) Size x Length)	Bulk Part No.	Bulk Box Qty.	Handy Pack Part No.	MC Qty./Screw Qty. (per EA)
Calib	ourn™ XL				
19/6	4" x 2-3/4" 4" x 3-1/2" 4" x 5"	55778	400	57774 57778 57785	10 / 25 10 / 25 10 / 25





POWDER COATED HEAD FOR A CLEAN FINISHED LOOK

This screw has an integrated washer-head and is complemented by a rubber washer below the screw head. This feature also helps protect the washer from prolonged exposure to the sun for long lasting, secure siding installations.

- White Color, Low Profile Head produces a clean, finished look which is preferred for moldings, closet organizers, and metal siding
- Washer Head increases holding power
- Rubber Washer: seals drill hole from the elements
- W-Cut™ Thread Design tiny saw blades reduce torque by cutting through the material
- **ZIP-TIP™** for easy starts and no pre-drilling
- For use in interior or exterior applications including metal siding, garage door trim, and even closet organizers. Not for use with treated lumber

APPLICATIONS:

- Metal Siding
- Garage Door Trim
- Closet Organizers





U.S (Std.) Size	Bulk	Bulk
(Dia. x Length)	Part No.	Box Qty.
#9 x 1-1/2"	40090	3000

• 1" bit included in Handy Packs

STAR DRIVE BITS CROWN / BIT



Bit Size	Bit Color	Fits	Bulk Part No.	Bulk Box Qty.	Carded Part No.	Carded Qty/per pack
T-10 2" T-10 3"	Yellow Yellow	Trim™ Head #8	86419	25	187419 87421	2 2
T-15 2" T-15 3"	Red Red	R4 [™] Screw #6 & 8 Trim [™] Head #9 Cabinet [™] Screw	86427	25	187427 87429	2 2
T-20 2"	Purple		86435	25	187435	2
T-25 2" T-25 3"	Green Green	R4™ #9,10 &12 RSS™ #10 & 1/4" MSS™ #9	86443	25	187443 87445	2 2
T-30 2" T-30 3"	Black Black	RSS™ Structural Screw 5/16" Caliburn™ & Caliburn PH™	86451	25	187451 87453	2 2
T-40 2"	Blue	Caliburn XL™ Screws RSS™ Structural Screw 3/8″	86459	25	187459	2

Crown/Bit					
	TOP	STAR™		86465	1





TEADER 88 © DRIVING CONCRETE CONNECTIONS

Tapcon® is the #1 recognized screw anchor brand in the industry. For decades, Tapcon has helped professionals get their concrete anchoring jobs done right the first time, every time.

The blue, corrosion-resistant coating enables our anchors to withstand the harshest conditions, and their unmatched performance (30% less torque and 20% more holding power) in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs and lag shields.

For quality, strength, and ease of installation, nobody matches the confidence pros get from using the original true blue screw.





TAPCON® CONCRETE SCREW ANCHORS



NOTHING ANCHORS LIKE A TAPCON.

Tapcon concrete anchors deliver the ease of use, superior precision, and unparalleled performance that professionals demand.

- **Eliminate bit slips** and increase productivity with star recess on flat head Tapcon anchors
- **Resist head snaps** and spin outs with under-head ribs on hex head Tapcon anchors
- **Superior holding strength** for confidence in a job done right
- Corrosion resistant, long lasting performance with Climaseal™ coating
- **WERCS threadform** allows for easy installation across a variety of masonry substrates
- **ICC-ES** recognized for use in concrete and masonry (ESR-2202 & ESR-1671)

APPLICATIONS:

Star Head

- Furring Strips
- Wood Framing
- Window Frames

Hex Head

Electrical Boxes





U.S (Std.) Size (Dia. x Length)	Bucket Part No.	Bucket Qty.	Lg. Clam Part No.	Lg. Clam Qty.	Med. Pack Part No.	Med. Pack Qty.	Small Pack Part No.	Small Pack Qty.
STAR HEAD								
3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 3/16" x 3-1/4" 1/4" x 1-3/4" 1/4" x 2-1/4" 1/4" x 2-3/4" 1/4" x 3-3/4" 1/4" x 4"	28550 28555 28560 28565 28575 28585	225 225 225 225 225 225 150	28350 28355 28360 28365 28307 28375 28380 28385 28395 28304	75 75 75 75 75 75 75 75 75	28250 28255 28260 28265 28275 28280 28285 28390 28397	25 25 25 25 25 25 25 25 25 25 25	28150 28155 28160 28165 28107 28175 28180 28185 28295 28204	8 8 8 8 8 8 8 8
HEX HEAD								
3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-1/4" 1/4" x 1-3/4" 1/4" x 2-1/4" 1/4" x 2-3/4" 1/4" x 3-1/4" 1/4" x 3-3/4" 1/4" x 4"	24515 24520 24525 24530 24501	225 225 225 150 150	24300 24305 24310 24315 24320 24325 24330 24301 24340	75 75 75 75 75 75 75 75	24200 24205 24210 24215 24220 24225 24230 24335 24345	25 25 25 25 25 25 25 25 25 25	24100 24105 24110 24115 24120 24125 24130 24101	8 8 8 8 8 8
WHITE ULTRASH	IELD TAPCO	N						
3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 1/4" x 2-3/4" 1/4" x 3-1/4" 1/4" x 3-3/4"			28371 28372 28367 24388 24391 24392	75 75 75 75 75 75	28267 24288	25 25	28171 28172 28167 24188	8 8 8 8
410 STAINLESS ST	TEEL TAPCO	N						
3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-3/4" 1/4" x 2-3/4"							26155 26165 26120 26130	8 8 8 8
MAXI-SET TAPCO	N							
1/4" x 2-1/4" 1/4" x 2-1/4"			24326 24323	50 50				
TAPCON DRILL B	ITS							
5/32" x 3-1/2" 5/32" x 4-1/2" 5/32" x 5-1/2" 3/16" x 3-1/2" 3/16" x 4-1/2" 3/16" x 5-1/2" 5/32" x 7" SDS 3/16" x 7" SDS 1/4" x 7" SDS 3/8" x 8" SDS 1/2" x 10" SDS					11249 11250	4	11256 11247 11363 11257 11248 11362 11492 11491 11493 11494 11495	1 1 1 1 1 1 1 1 1 1
TAPCON PRO INS	TALLATION	KIT						
Tapcon Pro Install Tool							79013	1

TAPCON+® HEAVY DUTY CONCRETE SCREW ANCHORS



STRONGER. FASTER. EASIER.

Tapcon+ unmatched performance in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs, lag shields and have a blue corrosion resistant coating that enables them to withstand the harshest conditions. That's why when pros look for quality, strength and ease of installation, they choose Tapcon.

- **ICC-ES Approved** for use in uncracked & cracked concrete and seismic conditions (ESR-3699)
- **Heavy-Duty Holding Power** in all concrete conditions
- **Flexibility:** to install closer to the edge & closer together with confidence
- Precision Fit: A long-standing reputation for quality, strength, and ease of installation from industry professionals









U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Pro Pack Pail Qty.	Small Pack Part No.	Small Pack Qty.
5/16" x 2-1/4"			24292	15	24192	4
5/16" x 3"			24293	15	24193	4
3/8" x 1-3/4"	11440	10			50440	2
3/8" x 2-1/4"	11441	10			50441	2
3/8" x 3"	11413	10			50403	2
3/8" x 4"	11414	10			50404	2
3/8" x 5"					50445	2
3/8" x 6"					50446	2
1/2" x 3"	11447	10			50447	2
1/2" x 4"	11420	10			50408	2
1/2" x 5"	11449	10			50449	2
1/2" x 6"	11421	10			50426	2



- Sill Plates
- Post Cap Connector
- Ledger Board
- Heavy Equipment
- Industrial Racking/Shelving
- Modular Walls
- Machinery

Trubolt WEDGE ANCHORS HEAVY DUTY CONCRETE ANCHORS



MAXIMUM STRENGTH FOR HEAVY-DUTY CONCRETE ANCHORING

Trubolt Wedge Anchors offer maximum strength and ultimate flexibility making them the PRO choice for heavy-duty anchoring. This wedge anchor features a high-strength body that is built to resist tension and shear loads.

- **ICC-ES Approved** for use in uncracked concrete (ICC-ES-ESR-2251)
- Heavy-Duty Holding Power in concrete conditions
- Fully Threaded Anchor Design for application versatility
- Stainless Steel Clip provides extra corrosion protection
- A long standing reputation for quality, strength, and ease of installation from industry professionals







U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
1/4" x 2-1/4"			12377	25	50080	1
3/8" x 2-1/4"	12367	50	12015	15	50081	1
3/8" x 3"	03014	50			50082	1
3/8" x 3-3/4"	12370	50	12016	15	50083	1
3/8" x 5"			12022	15	50084	1
1/2" x 2-3/4"					50085	1
1/2" x 3-3/4"	12371	25	12017	10	50181	1
1/2" x 4-1/4"	12372	25	12020	10	50086	1
1/2" x 5-1/2"	12373	25	12019	10	50087	1
1/2" x 7"					50088	1
5/8" x 5"	12310	10			50089	1
5/8" x 6"	03041	10				
5/8" x 7"	03044	10			51030	1
5/8" x 8-1/2"					50305	1
3/4" x 5-1/2"	02992	10			51001	1
HOT-DIPPED GALV	VANIZED					
1/2" x 5-1/2"HDG			12021	10	50303	1
1/2" x 7" HDG	12029	10			50307	1



- Machinery
- Sill plate installation

RED HEAD® CONCRETE ANCHORS CONCRETE ANCHORS



VERSATILE ANCHORING SOLUTIONS FOR CONCRETE & BUILDING

Red Head can help you get any job done right, from heavy-duty ceiling applications to light-duty work in block and brick.

Our sleeve anchor is our most versatile anchor with the ability to fasten in block, brick, masonry, and solid concrete.

For a lighter duty project, Poly-Set and Hammer-Set are great choices for block, brick and concrete and allow for a quick and easy installation. For heavy-duty overhead applications, use our Drop-In anchors. Use the complete family of anchors and SDS bits to ensure precise hole depth and diameter when using our anchors.





U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Qty.	Handy Pack Part No.	Handy Pack Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
SLEEVE ANCHORS		•				
1/4" x 2-1/4" Acorn Hd 1/4" x 2-1/4" Threshold Hd 1/4" x 3-1/8" Flat Hd 5/16" x 1-1/2" Hex Hd 5/16" x 2-1/2" Hex Hd 3/8" x 1-7/8" Hex Hd 3/8" x 3" Hex Hd 1/2" x 2-1/4" Hex Hd 1/2" x 4" Hex Hd 5/8" x 4-1/4" Hex Hd 5/8" x 6" Hex Hd	11281 11283 11285	50 25 25	11013 11014 11018	15 10 10	50122 50123 50121 50112 50113 50114 50115 50116 50117 50118 50119 50120	1 1 1 1 1 1 1 1 1
POLY-SET ANCHORS					50120	
1-1/4" 1-7/16"			35220 35225	50 50		
1/4" x 1" 1/4" x 1-1/2" 1/4" x 2" 1/4" x 3"	35300 35303 35305 35207	75 50 50 25	35200 35203 35205	25 15 15		
DROP-IN ANCHORS						
3/8" Anchor 1/2" Anchor 3/8" Setting Tool 1/2" Setting Tool	01891	50			50125 50126 07499 07501	1 1 1 1



- Conduit Clips
- Drywall tracks
- Curtain rods
- Shelving
- Shelf Ledgers
- Racking
- Secure Transformers
- Light Fixtures

A7+ ADHESIVE ANCHORS HIGH STRENGTH ADHESIVE ANCHORING SOLUTION



CONCRETE ANCHORING AND REINFORCING SOLUTIONS

For jobs requiring versatility, high performance, and efficiency, Red Head's A7+ Concrete Adhesive Anchor is the one anchoring solution that does it all. A7+ takes only 45 minutes to fully cure and can be used in challenging conditions like cold temperatures and water-filled holes. A7+ is also ICC-ES approved for cracked concrete and seismic building code requirements.

- **ICC-ES approved** For use in cracked concrete and seismic conditions (ICC-ES-ESR-3903)
- Quick 45 minute cure time for fast installation
- **Easy dispensing** with a standard caulk gun, eliminating the need for any special tools
- Increased productivity with a successful cure in saturation concrete and water-filled holes
- A long-standing reputation for quality, strength, and ease of installation from industry professionals.





ESR-3903



ESR-3951



A7+ can also be used in any standard mediumduty caulk gun, eliminating the inconvenience of needing a special dispensing tool. Combine the simplicity of dispensing with the quick-curing product, and installation is fast, easy, and doesn't take time away from the rest of the project. The A7+ concrete adhesive anchoring solution is a high-performing anchor that rivals other products on the market in both price and features. This high performance and efficiency allows for less time on the job and more productivity.

Providing code approved performance and a fast 45 minute cure time, Red Head A7+ is the concrete anchoring adhesive that delivers.

U.S (Std.) Size (Dia. x Length)	Part No.	Qty.
9.5 oz. Cartridge	07111	1



APPLICATIONS:

For use in:

- Concrete
- Grout-filled and hollow brick
- Clay tile

RAMSET® TOOLS PINS + LOADS















ESR-1799



ESR-2690

DURABLE. STURDY. POWERFUL.

From concrete to steel, Ramset has the tool to help you get the job done on time. Ramset is designed with speed and productivity in mind. With innovative solutions we provide you with the best anchoring experience.

- Powder actuated tools for concrete or steel
- Drives jobsite speed through quick and efficient fastening
- Market leading tool innovations help you get the job done right
- The Powder Actuated Tool choice for PROs

Item/Tool	Part No.	Qty.
Cobra+ .27 Caliber Semi-Automatic Powder Actuated Tool	16942	1
MasterShot .22 Caliber Single-Shot Powder Actuated Tool	40088	1
TriggerShot .22 Caliber Single-Shot Powder Actuated Tool	40066	1
HammerShot .22 Caliber Single-Shot Powder Actuated Tool	00022	1



U.S (Std.) (Dia. x Le	Size ength)		o Pack ort No.	Pro Pa Qty.	ack	Handy Pack Part No.	Handy Pail Qt	Pack y.		
DRIVE PIN	IS									
.300 x 1/2" .300 x 3/4" .300 x 1" .300 x 1-1/2"			06171 00747 00759 00774 00780		100 100 100 100 100					
.300 x 2" .300 x 2-1 .300 x 3"	/2"		00786 00794		100 100 100	00787		25		
DRIVE PIN	IS WITH WA	SHERS								
.300 x 1-1 .300 x 2"	.300 x 1-1/2" .300 x 1-1/4" .300 x 2") x 1-1/2") x 1-1/4"		00797 00803 00800 00806 00809		100 100 100 100 100	00804 00810		25
.300 x 2-1	12		07886		100	07887		15		
RAMGUA	RD DRIVE PII	NS FOR US	E IN TREATED L	UMBER						
	/2" /2" with Was vith Washers	shers	09167 09173 09176		100 100 100					
Caliber	Color	Туре	Strip Load Part No.	Qty.	Single Shot Box Pt. #	Single Shot Box Qty.	Single Shot Blister pt.#	Single Shot Blister Qty.		
.22 .22 .22 .27 .27	Brown Green Yellow Green Yellow Red	Powder Powder Powder Strip Strip Strip	00652 00667 00682	100 100 100	00594 00601 00607	100 100 100	50077	25		



- 2 x 4 framing
- Furring strips
- Attaching electrical boxes

Teks was established in 1967 with the introduction of the original self-drilling screw. Since then, we have continued to innovate and provide value-added metal fastening solutions to the construction market.

We take pride in our commitment to operational excellence, superior service and new product development. That has guided the company through decades of growth by meeting the ever-changing needs of the residential/renovation construction industry. Focusing on the needs of our end-users enables us to optimize our product offering and service based on their requirements.



TEKS® METAL FASTENERS ROOFING SCREWS



TEKS ROOFING SCREWS

Teks Roofing Screws provide secure metal to metal fastening with strong holding power, without need to pre-drill.

- The **self-sealing neoprene washer** provides a waterproof seal.
- The premium finish provides exceptional corrosion resistance in harsh outdoor environments.

Teks colored roofing screws are designed for fastening colored metal roofing and siding panels for a perfect color match that provides a clean look and quality finish.

- Full head paint coverage
- Incorporates durable and long lasting liquid paint
- High grade steel
- Weather tight seal

The Elite screws are trusted for their superior drilling performance, fast installation and holding power – making them the go-to screw for pros who want unparalleled performance and superior results.

- Maxiseal[™] Washer: Washer attached directly to head of screw for better waterproofing - even at an angle.
- **Shankguard™:** Improved under-roof corrosion resistance.
- Hi-grip™* Threading: Prevents water entry and over-drilling *Not available on 1" screws
- Climacoat Coating: No streaking or rust from corrosion
- Comes in drill point and sharp point



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.	
TEKS® ROOFING SCREWS					
HEX WASHER HEAD / SHARP POI	NT (METAL TO WOOD)			
9 x 1" 9 x 1-1/2"	21401 21406	360 400	21400 21404	120 100	
HEX WASHER HEAD / DRILL POIN	IT (METAL TO METAL)				
12 x 3/4" 12 x 1" 12 x 1-1/2"	21418 21422	400 300	21408 21412	90 80	
TEKS® COLORED ROOFING S	CREWS (SHARP POI	NT)			
9 x 1-1/2" (Green) 9 x 1-1/2" (White)			21414 21424	100 100	
TEKS® ELITE PREMIUM ROOFING SCREWS					
SHARP POINT					
10 x 1-1/2" 12 x 1"	21453 21450	300 120	21452	100	
DRILL POINT					
12 x 1" 12 x 1-1/2"	21473	225	21470 21472	80 75	

APPLICATIONS





ROOFING SCREWS:

- Ideal for attaching metal roofing and siding
- Sharp point for use in metal to wood applications
- Drill point for use in metal to metal applications

TEKS® METAL FASTENERS METAL TO METAL SCREWS



SECURELY FASTEN METAL WITH SPEED

Teks® fasteners are offered in sharp and drill points that easily penetrate light to heavy gauge metal and wood. Professionals no longer have to struggle when engaging their work surface.

Teks® fasteners are offered in a wide variety of head styles to meet professionals installation needs. No tool slippage or cam-outs even with old sockets and worn bits. Professionals can drill, tap, and fasten – all in one motion.

- Drive surface and recess: Reduces cam-outs to prevent slipping during installation
- **Drill Points:** Self-drills through light to heavy gauge metal with ease
- **Sharp Points:** Self-pierces into light gauge metal to start drilling faster
- Self-Tapping Threads: Taps their own threads to provide less effort when fastening into metal
- Corrosion Resistant Finish: Protects the job's appearance with long lasting coating

APPLICATIONS



METAL TO METAL:

- Attaching HVAC
- Electrical
- Metal framing
- General metal to metal applications



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.	
TEKS® METAL TO METAL SCREWS					
HEX WASHER HEAD / DRILL POINT (METAL TO METAL)					
8 x 1/2"			21308	280	
8 x 3/4"			21312	180	
8 x 1"			21316	170	
10 x 5/8"			21396	170	
10 x 3/4"	21322	450	21320	150	
10 x 1"			21328	140	
10 x 1-1/2"			21332	90	
12 x 3/4"			21336	120	
12 x 1"	21341	400	21340	100	
12 x 1-1/2"			21344	80	
12 x 2"			21348	60	
12/14 x 2"			21820	60	
14 x 3/4"			21349	100	
14 x 1"			21351	60	
14 x 1-1/2"	04000	400	21352	50	
14 x 2-1/2"	21358	120	21356	30	
HEX WASHER HEAD / SHARP POI	NT (METAL TO METAL	.)			
6 x 1/2"			21301	320	
8 x 1-1/2"			21318	85	
10 x 3/4"			21327	150	
PAN HEAD / DRILL POINT (META	AL TO METAL)				
8 x 1/2"			21360	300	
8 x 3/4"			21364	240	
10 x 3/4"			21372	170	
PAN HEAD / SHARP POINT (MET	AL TO METAL)				
6 x 1/2"			21359	300	
PANCAKE HEAD / DRILL POINT (METAL TO METAL)				
10 x 5/8"			21376	190	

TEKS® METAL FASTENERS LATH SCREWS AND WOOD TO METAL SCREWS



Teks Lath Screws provide secure metal-to-metal and metal-to-wood fastening with strong holding power, without the need to pre-drill.

- Lath head: Lath Screws feature a low-profile head for a semi-flush finish for virtually any application
- Self-tapping threads: Ensure strong holding power
- **Zinc plated finish:** Protects the job's appearance.

Teks Wood-to-Metal screws help you secure wood to metal without pre-drilling. The special wings ream a hole in the wood to prevent thread engagement during drilling; these wings break away when self-tapping into metal providing a secure hold.

- Precision point with wings: Designed to drill, tap, and fasten all in one motion
- **Climacoat premium coating:** Provides a long life finish for exterior applications
- High performance drive: Surfaces reduce camouts to penetrate surface the first time for easy installation
- Wings: Ream a hole in the wood to prevent thread engagement and break away when self-tapping into metal

APPLICATIONS



LATH SCREWS:

- Attaching lath to wood or steel studs for stucco/ plaster applications
- Attaching pre-drilled metal brackets to post-framing
- Any general applications requiring a wide, low-profile head



WOOD TO METAL:

- Attaching roof/subfloor decking
- Attaching trailer beds to frame
- Attaching wood headers to steel frame



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Qty.
TEKS® LATH SCREWS				
MODIFIED TRUSS HEAD / SHARP	POINT (METAL OR LA	TH TO WOOD)		
8 x 1/2"			21500	260
8 x 3/4"	21506	600	21504	200
8 x 1"	21510	510	21508	170
8 x 1-1/4"			21512	140
8 x 1-5/8"			21516	120
8 x 2"			21518	100
8 x 2-1/2"			21519	80
MODIFIED TRUSS HEAD / DRILL F	POINT (LATH OR META	L TO METAL)		
8 x 1/2"			21520	260
8 x 3/4"	21525	600	21524	200
8 x 1"	21530	510	21528	170
8 x 1-1/4"			21532	140
8 x 1-5/8"			21536	120
8 x 2"			21538	100
8 x 2-1/2"			21540	80
TEKS® WOOD TO METAL SCREWS				
PHILLIPS FLAT HEAD / DRILL POINT W/REAMER WINGS (WOOD TO METAL)				
1/4-20 x 3"			21378	40
10 x 1-7/16"	21381	300	21380	100
12 x 2-3/4"	21386	200	21384	40

BACKER-ON®, ROCK-ON® CEMENT BOARD SCREWS



CEMENT BOARDS FASTENED RIGHT

Backer-On® cement screws are designed for attaching HardieBacker® cement board and Rock-On® cement board screws are designed for attaching Durock® cement board to wood or light gauge steel studs. The patented serrated head design countersinks for a flush finish even at angle, providing a smooth surface for tile installation. The T-25 Star Drive recess provides Stikfit™ for one-handed installation. Climacoat corrosion resistant finish prevents rust from bleeding into grout. Making it perfect for use in high moisture areas such as bathrooms and kitchens.

Backer-On® and Rock-On® cement board screws comply with ANSI standards for cement board installation as specified by cement board manufacturers. Cement board manufacturers require ANSI compliance in order to remain eligible for warranty.

- **Serrated Head:** Designed to drive flush even at an angle
- **Star Drive with T-25 Bit:** Provides Stikfit[™] for easy one-handed installation and eliminates cam-outs
- Hi-Lo / Single Threads: Starts quickly and drives smooth in cement boards
- **Sharp Points:** Offers immediate pick-up and eliminates the need to pre-drill
- **Climacoat Finish:** Corrosion resistant for preventing rust from bleeding into tile



U.S (Std.) Size (Dia. x Length)	Pro Pack Part No.	Pro Pack Pail Qty.	Handy Pack Part No.	Handy Pack Ctn. Size/Qty.	
BACKER-ON® SCREWS					
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23406 23416	750 575	23401 23411 23421	M/185 M/140 M/100	
ROCK-ON® SCREWS					
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23306 23316	750 575	23301 23311 23321	M/185 M/140 M/100	
BACKER-ON® ROCK-ON® SCREWS					
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23505 23515	750 575	23500 23510 23520	M/185 M/140 M/100	



APPLICATIONS:

- Attaching fiber cement board to wood or light gauge steel framing
- Attaching fiberglass reinforced cement board to wood or light gauge steel framing

Pro Tip: Standard roofing nails, dry wall screws, and other alternatives to cement board screws are typically not specified by cement board manufacturers and not ANSI compliant.

E-Z ANCOR® DRYWALL ANCORS



E-Z Ancor® Twist-N-Lock



E-Z Ancor® Stud Solver



E-Z Ancor® Toggle Lock



E-Z Ancor® Heavy Duty Toggle Lock

EASY TO INSTALL WITH STRONG HOLDING POWER

E-Z Ancors® are ideal for hanging accessories, signs, fixtures, and shelving units on drywall. Designed to self-drill flush into drywall for easy and fast installations. No pre-drilling necessary. The threads are formed to provide increased stability and a secure hold.

E-Z Ancor® Twist-N-Lock is designed for light to medium-duty applications. The audible click provides confirmation of the anchor being firmly set. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® Stud Solver is designed for light to medium-duty applications. Installs anywhere on a wall, even if you hit a wood stud behind the drywall. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® Toggle Lock is designed for heavy-duty drywall applications. The superior 1-piece assembly prevents losing extra pieces behind the wall. The toggle bar swivels easily during assembly to provide a secure hold.

Buildex® Stucco Anchor is designed for light to medium-duty applications in stucco. The zinc plating is designed to be durable in exterior and interior applications. Kits include a drill bit for installation.

E-Z Ancor® Heavy Duty Drywall Toggle Anchors are designed for medium to heavy-duty hollow wall applications. The metal toggle bar clamps the wall providing an even and secure hold. The flexible plastic straps allow the toggle bar to swivel for easy installation.

- No Pre-Drilling: Screws directly into drywall with a Phillips screwdriver
- **Self-Piercing Point:** Positions anchor in desired location without slipping and starts self-drilling faster
- Clean Finish: Installs flush into drywall
- **Strong Holding Power:** Prevents loose connections and items from wobbling



U.S (Std.) Size (Max Load)	Lg. Pack Part No.	Lg. Pack Qty.	Med. Pack Part No.	Med Pack Qty.	Small Pack Part No.	Small Pack Qty.
E-Z ANCOR TWIST-N-LOCK	ANCHORS					
50 lbs. 75 lbs.	25350 25310	50 50	25200 25210	25 20	11353 11364	6 4
E-Z ANCOR STUD SOLVER A	NCHORS					
40 lbs. 50 lbs.	25325 25316	50 50	25225 25216	25 20	25125 29503	4 5
E-Z ANCOR / E-Z TOGGLE LO	OCK ANCHOR					
100 lbs.	25320	25	25220	10	10006	2
BUILDEX® STUCCO ANCHO	RS					
3/16"x 1-1/2"Hex Hd 3/16"x 1-1/2"Flat Hd 1/4"x 2-7/8"			31810 31820 31840	25 25 25	31710 31720 31740	4 4 4
E-Z ANCOR HEAVY DUTY TOGGLE ANCOR						
110 lbs 3/16" Bolt 120 lbs 1/4" Bolt			25730 25731	25 25	25720 25721	10 10

E-Z ANCOR CONTRACTOR PACKS					
U.S (Std.) Size (Max Load)	Contractor Pack Part No.	Contractor Pack Qty.			
E-Z ANCOR CONTRACTOR TWIST-N-LOCK ANCHORS					
75 lbs.	25410	100			
E-Z ANCOR CONTRACTOR STUD SOLVER ANCHORS					
50 lbs.	25616	100			
E-Z ANCOR TWIST-N-LOCK AND STUD SOLVER ANCHORS COMBO					
50 lbs./75 lbs.	25600	25/25			

Warning: Do not use Twist-N-Lock or Stud Solver anchors for ceiling applications. Do not use for mounting televisions. Load ratings are for items hung flush to the wall. Load ratings decrease when hanging items that project from the wall.



APPLICATIONS:

For Mounting:

- Picture Frames
- Shelving
- Mounting Brackets
- Hooks
- And more

LIABILITY AND WARRANTIES

Mechanical Fastening Warranty: (Includes GRK Fasteners, Tapcon, Red Head, Ramset, Teks, Rock-On, Backer-On, and E-Z Ancor). ITW Brands warrants that these products are free from defects in material and workmanship. ITW Brands's sole liability for any breach of this warranty shall be to replace this product or refund the purchase price.

Liability: Claims against GRK or ITW Brands shall be limited to a refund or credit for the price billed or paid for faulty or incorrect merchandise. Seller shall not be responsible for buyer's manufacturing costs, labor, alternate purchases, extra freight, replating, plating, lost profit, good will, recall costs, or other incidental or consequential damages.

Refunds/Replacements: In order to request a refund or replacement, please contact ITW Customer Service at BrandsCS@itwbrands.com or 877 489-2726 to start the process.

THERE ARE NO UNDERSTANDINGS, AGREEMENTS, REPRESENTATIONS, OR ADDITIONAL WARRANTIES, EXPRESSED OR IMPLIED (INCLUDING ANY REGARDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), NOT SPECIFIED HEREIN, RESPECTING ANY SALE OF PRODUCTS BY GRK FASTENERS™ (TO THE EXTENT PERMITTED BY LAW).

LIABILITY AND WARRANTIES

GRK Fasteners™ ("GRK") is a distributor of commercial-grade fasteners. The parts that we supply are quality inspected by independent labs.

We maintain lot traceability on all products listed in this catalog as long as they are in their original bulk boxes. Certifications are maintained on all fasteners.

Hydrogen Embrittlement: GRK takes measures during production of all fasteners to mitigate hydrogen embrittlement, including post-coating baking. These processes, however, do not guarantee that hydrogen embrittlement will not still be present or that it will not occur at a later date while in service. Specialized testing or a substitute part may be required, depending on the application.

GRK Warranty: GRK warrants to the first retail purchaser that its Climatek[™] coated, Deck Elite coated, and PHEINOX[™] stainless steel screws will not rust under normal environmental conditions when used in accordance with the recommendations listed in this catalog. This warranty is not transferable. Visit www.grkfasteners.com for more information.



paslode.com





tapcon.com



backeronrockon.com



ramsetpat.com





redheadanchoring.com



easyanchors.com

FULL-LINE CATALOG

